

SELLO CÓNICO MODELO TS155

MARCA TRISUN



Composición Disponible en el formato carbón/cerámico, tungsteno/vitón.

Aplicaciones Bombas tales como AESSEAL T04, Burgmann BT-FN, FLOWSERVE 43 and MUT SIMPLEX)

Datos Técnicos

Pressure: $\leq 1\text{MPa}$

Speed: $\leq 15\text{ m/s}$

Temperature: $-30^{\circ}\text{C} \sim +200^{\circ}\text{C}$

Rotary Ring (Ceramic/Sic/tc)


Stationary Ring (Plastic Carbon/Carbon/Sic/Tc)

Secondary Seal (nbr/Epdm/VITON)

Spring & Other Parts (Sus304/Sus316)

MODELO	d ₁ (mm)	d ₃	d ₇	l ₁	l ₃
TS155-10	10	20	18.1	20.5	5.5
TS155-11	11	22	20.6	23.5	5.5
TS155-12	12	22	20.6	23.5	5.5
TS155-13	13	25	23.1	28	6
TS155-14	14	25	23.1	28	6
TS155-15	15	29	26.9	30	7
TS155-16	16	29	26.9	30	7
TS155-17	17	29	26.9	30	7
TS155-18	18	33	30.9	32	8
TS155-19	19	33	30.9	33	8
TS155-20	20	33	30.9	33	8
TS155-21	21	38	35.4	33	8

MODELO	d ₁ (mm)	d ₃	d ₇	l ₁	l ₃
TS155-22	22	38	35.4	33	8
TS155-23	23	38	35.4	35	8
TS155-24	24	38	35.4	35	8
TS155-25	25	40	38.2	35.5	8.5
TS155-28	28	46	43.3	39	9
TS155-29	29	46	43.3	39	9
TS155-30	30	46	43.3	39	9
TS155-32	32	46	43.3	39	9
TS155-33	33	50	53.5	50.5	11.5
TS155-35	35	50	53.5	50.5	11.5
TS155-38	38	60.5	60.5	50.5	11.5
TS155-40	40	60.5	60.5	50.5	11.5

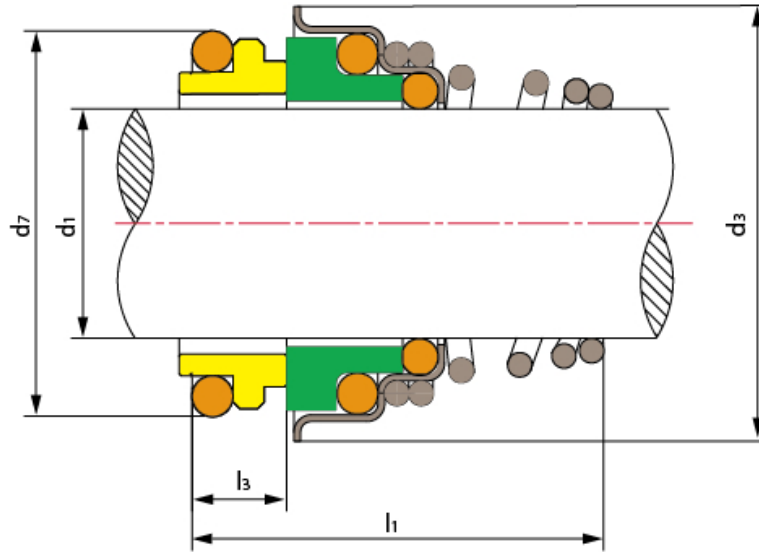

Disponibilidad: permanentemente.